

## HP08 Hydraulic Power Unit



### OPERATION AND PERFORMANCE

ITEM	U.S.A.	METRIC
Hydraulic Output	5 gpm	19 lpm
Weight (Dry)	133 lbs	60
Length	28 in.	71 cm
Width	18.5 in.	47 cm
Height	21 in.	53.5 cm
Fuel Capacity	1.5 gal.	6 ltr
Hydraulic Oil Capacity	1.6 gal	6.2 cm
Sound Power Level	102 LWA	

### MAIN FEATURES

The HP08 is a lightweight compact hydraulic power unit that has been designed to provide hydraulic power for applications where space and weight are a requirement.

Hydraulic Cooling System utilizes a blower wheel for increased cooling capacity


Low engine oil shutoff protects your investment.

Tubular stainless steel wrap-around frame prevents costly damage to harsh working environments

Power-on demand throttle conserves fuel and engine wear and tear by idling the engine when the tool trigger is not engaged.

25 micron hydraulic filter protects your tools while making on-site filter changes a snap. In addition the hydraulic oil level sight gauge allows for easy maintenance of proper fluid levels

- Low Engine Oil Shut-off
- Comfortable self-locking handle
- Delivers 5 gpm (19 lpm) at 2000 psi (140 bar)
- Recoil start
- Rugged steel wrap-around frame
- Honda 9hp engine
- Power On Demand Throttle

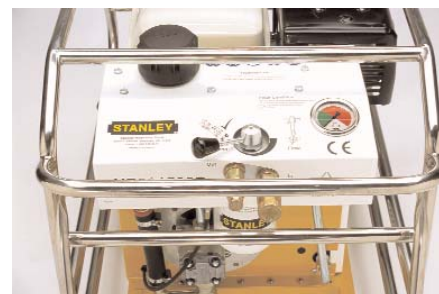

TRACK  
WARNING

HYDRAULIC  
TOOLS

THERMITE  
WELDING

HYDRAULIC  
TOOLS

CATENARY  
MEASURING

TRACK  
MEASURING

TRACK  
WARNING

HYDRAULIC  
TOOLS


THERMITE  
WELDING

HYDRAULIC  
TOOLS

CATENARY  
MEASURING

TRACK  
MEASURING

Stanley products are available to suit many of the world's railway standards. For further details, please contact your distributor.



Rugged stainless steel wrap-around frame provides for easy handling and protection against the rigors of day to day use.



Efficient hydraulic cooling utilizes direct drive blower wheel providing high efficiency cooling.

## Ordering Information

Model Number	Description
<b>HP081523D</b>	<b>Single Circuit Hydarulic Power Unit</b>
41128	Spin On Filter
05008	25ft Dual Hydraulic Hose
24069	HTMA Flush Face Hydraulic Coupler Set 3/8 NPTF
24070	HTMA Flush Face Hydraulic Coupler Set 1/2 NPT
04182	Flow and Pressure Tester

## WHERE TO ORDER

*DISTRIBUTOR DETAILS*



+1 503 659 5660 +1 503 652 1780  [www.stanleyrailroadproducts.com](http://www.stanleyrailroadproducts.com)

 Stanley Railroad Products 3810 SE Naef Rd. Milwaukie, Oregon 97267 USA